Garage Door

SELECTION GUIDE

























The Genuine. The Original.



Table of content:

Choosing a door	3
Signature® Carriage Wood	4-5
Traditional Wood Collection	6-9
Modern Aluminum Collection	10-11
Envy™ Collection	12-13
Impression Fiberglass Collection®	14-15
Impression Steel Collection	16-17
Carriage House Collection	18-19
Courtyard Collection®	20-21
Courtyard Collection®WindStorm™	22-23
Thermacore® Collection	24-25
Thermacore $^{\otimes}$ Collection WindStorm $^{^{ ext{ iny M}}}$	26-27
Durafirm Collection™	28-29
Traditional Steel Collection	30-31
WindStorm [™] wind load-rated system	32
Decorative hardware	33
Windows for Signature® Carriage Wood	34
Windows for Thermacore® Collection	35
Windows for Thermacore $^{\tiny{\textcircled{\tiny{\$}}}}$ WindStorm $^{\tiny{\texttt{TM}}}$	36
Windows for Traditional Steel Collection	37
Openers	38-39
National distributor network	40

Note

Previous model numbers and panel styles are shown in parenthesis in gray on each model page.

Call 1-800-929-3667 (DOOR) to contact an Overhead Door™ Distributor near you.

overheaddoor.com

Choosing a Door

What to consider when selecting a door



Courtyard Collection, Model 7520, X panel (167T), Brown finish, Stockbridge windows, decorative hardware

Style

Whether your home is classic or contemporary, we offer styles to best complement your home's architecture. For a distinctive, custom look, choose insulated doors from our elegant Courtyard Collection®, Thermacore® Collection, Impression Fiberglass Collection® or the custom fine wood doors of the Signature® Carriage Collection.

Safety

Our Impression Fiberglass Collection® doors provide peace of mind with pinch-resistant panels that help protect fingers. If you live in an area that is prone to high winds, ordered with the appropriate wind load options, our WindStorm™ doors provide reliable protection against high wind damage and offer fine craftsmanship, durability and style.

Comfort

If you live in a climate with extreme hot or cold temperatures, we recommend a well-insulated, thermally-efficient door to ensure your comfort. Some of our insulated doors, including the Courtyard Collection® and Thermacore® Collection, also feature a steel backing that lends a finished, clean look to your garage's interior.

Signature[®] Carriage Wood

Premium wood doors - Models 9940, 9950, 9960

Panel styles

Doors provided in unfinished, stain-grade or paint-grade wood.

Models are available with or without windows and with square or arched tops.

Parson Collection

Vertical Board (R4)

(580 Bristol Narrow)



Vertical

Board (R1)



Vertical Board (PR3) (580 Bristol Wide)



Vertical Board (R2)

(571 Kingston Narrow) (571 Kingston Wide)



Vertical

Board (P1)

Vertical Board (P2)

(570 Drake Wide)



X Shaped

Overlay (X3)

(570 Austin Grooved)

Ponderosa Collection

Diagonal (X)[‡]

(580 Buchanan)



A Shaped Overlay (A)* (580 Sierra)

X Shaped Overlay (X3)*

(580 Dakota)



A Shaped Overlay (A3)

(570 Baxter)



X Shaped Overlay (X3)

(570 Austin)



A Shaped Overlay (A3)

(570 Baxter Grooved)





Villa Madre Collection

Horizontal Overlay (H)* (580 Ortega)



Overlay (C2)* (580 Medina)



Vertical Overlay (C3)* (580 Pizarro)



Vertical Overlay (C4)‡

(580 Cruz)



Horizontal/Grooved Overlay (HG)

(570 Castille Grooved)



‡ – insulated, R-value 4.75



Multiple designs and wood species options let you choose the perfect complement to your home with our style, window and glass options.



World class construction of rail and stile frame adds strength.

Polystyrene insulation can help diminish street noise and provide quieter door operation. R-value* of 4.75 available for select models.

*Overhead Door Corporation uses a calculated door section R-value for our insulated doors.

Window styles

For full selection of windows please see page 34.




Traditional Wood Collection


Rail and stile wood doors - Models 3240, 3260

Panel styles

Recessed panel designs Model 3240 (450, 453) Light Framed (FP1) or Heavy Framed (FP2)




Raised panel designs Model 3260 (454) Finger-jointed (RP1) or Solid




1 car design shown. Both panels are also available for 2 car designs. Decorative carved Raised panel designs available. Consult your Overhead Door™ Distributor for details.

Window styles

Recessed panel windows Model 3240 (450, 453)



Raised panel windows Model 3260 (454)



2 Panel - 4 over 4

2 Panel - 5 over 5

**Optional molded designs with plastic inserts may not fit all panel sizes. Consult your distributor for availability.

Glass types

Clear glass comes standard with this product. Additional glass options are available, including 1/8" tempered and 1/8" double strength (DSB). Contact your local Overhead Door™ Distributor for more details.



Recessed panel Model 3240

2 3

- 1 Recessed Panels are constructed of 13/8" high quality West Coast Hemlock.
- 3 Center of Recessed Panel is constructed of durable, ¼" exterior-grade hardboard.

Raised panel Model 3260

- 1 Door Sections are constructed of 13/8" thick finger-jointed wood rails and stiles; with solid stain-grade rails and stiles as an option.
- 2 Raised Panels are constructed of ¾" solid wood; edgeglued panels.

Mortise and tenon joints are glued and steel-pinned for increased strength and durability.

Shiplap section design provides weather-tight fit and smooth operation.

Rust resistant track and hardware are constructed of hot-dipped galvanized steel.

MODEL 3240 Recessed panel	MODEL 3240 Recessed panel	MODEL 3260 Raised panel (Paint grade)	MODEL 3260 Raised panel (Stain grade)
Features hardboard	Features hardboard	Features Hemlock	Features Hemlock
flat panels, thin rails	flat panels, thick	panels, stiles and	panels, stiles and rails
and stiles	rails and stiles	rails (finger-jointed)	(solid, one piece)
Smooth plywood	Smooth plywood	Hardboard raised	Meranti Mahogany
panel option	panel option	panel option	and Cedar panel
available	available	available	options available

3240 Model panels pictured above are custom painted.

Traditional Wood Collection

Flush panel wood doors - Model 3200

Panel styles

Wood Flush (Fo	•	car	
	Г		
	\vdash		

Solid arched top is optional.

Natural wood



Primed wood



All model panels have a total thickness of 13/8". Doors over 10' wide will have a vertical center seam.

Window styles



0.0 1.0 0



2 Panel – 4 over 4



4 Panel – 2 over 2



2 Panel - 5 over 5





2 Panel – 3 over 3

Windows shown for 1 car panel designs. Not all window will fit all door sizes. Factory will advise if there is a problem with fitting.

Glass types

Clear glass comes standard with this product. Additional glass options are available, including 1/8" tempered and 1/8" double strength (DSB). Contact your local Overhead Door™ Distributor for more details.



^{*} Molded designs with plastic inserts may not fit all panel sizes. Consult your distributor for availability.





Natural wood Primed wood 1 2 3 4

- 1 Section thickness is 13/8".
- 2 Polystyrene insulated core provides a 4.75 R-Value*.
- **3 External panels** are pressure-bonded to framework with high-strength, waterproof adhesive.
- 4 Primed painted finish available option.

Rust resistant track and hardware are constructed of hot-dipped galvanized steel.

*Overhead Door Corporation uses a calculated door section R-value for our insulated doors.

	MODEL 3200
Exterior wood/finish	Smooth plywood; priming option available; stained grade
Interior	Smooth plywood
Insulation	4.75 R-value, polystyrene

Modern Aluminum Collection

Models 9910, 9920

Frame options

Standard frame Model 9910 (511)

Features a narrow width and offers an array of frame finishes and special custom options in door sizes up to 16'0" wide.

Heavy-duty frame Model 9920 (521)

Features a wider, heavy-duty frame in door sizes up to 26' wide. Model 9920 can also be fitted to meet wind load building requirements.

Model 9910



Model 9920



Glass types

Double Strength (DSB) glass comes standard. In addition we offer an array of choices to complement your home. Insulated glass available.







Obscure*



Satin Etched*



Impact Frosted Polycarbonate

Specialty Glass

- Laminated White
- Low E Glass*
- Tempered Glass
- Tinted Glass*
- * Insulated options available

Glass alternatives

- Clear Lexan® Polycarbonate
- Multi Wall Polycarbonate
- Plexiglas® Acrylic
- Impact Clear and Frosted Polycarbonate - 0.250" min.

Colors

Anodized finishes



Clear (standard)



Light Bronze



Medium Bronze



Dark Bronze

Wood grain powder coat finishes (Model 9920 only)



Knotty Pine



Cnerry



Cherry with Flame



Dark Walnut

Powder coat finishes

Select from approximately 200 color options to best match your home.





Between section seals

Offer additional weather-resistance.

Commercial-grade aluminum frame

Low-maintenance and corrosion resistant.

Design flexibility

Available in a variety of vertical rail and horizontal stile widths to complement the style of your home.

Stylish hardware

Hinges and fixtures are galvanized to maintain a contemporary look.

Solid aluminum panels are also available.




$Envy^{\text{\tiny TM}}$ Collection

Model 9980

Frame options





Panels are available in different heights and widths. Contact your Overhead Door™ Distributor for details.

Glass types



Opaque White



Mirrored Bronze



Opaque Black



Translucent Black

Mirrored Gray

Structure finish

Powder Coat finishes







Black



Bronze

Anodized finishes



Black



Bronze

Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching before ordering your door.



¼" tempered glass panels are mounted on top of an aluminum structure for an ultra-modern, frameless look.



Powder coated hinges, struts and top bracket come standard, providing a finished, high-end appearance.

Weather barrier created by vinyl seals between tongueand-groove sections.

Patent pending rails with glass ledge providing precision glass alignment and additional security.

Meets ASHRAE 90.1 and IECC® air infiltration requirements with a third-party tested value of less than 0.4 cfm/ft².

Meets California Code of Regulation, Title 24 air infiltration requirements with a third-party tested value of less than 0.3 cfm/ft².

Aluminum and glass pairings:

ALUMINUM OPTIONS	GLASS COLOR
White Powder Coat	Opaque White
Black Powder Coat / Bronze Powder Coat / Black Anodized / Bronze Anodized	Opaque Black /Mirrored Gray / Mirrored Bronze / Translucent Black


Each door is unique and built to order, therefore a slight deviation in glass alignment is possible. These doors may become hot to the touch in sustained hot weather.

Impression Fiberglass Collection®

Model 7800

Panel styles

Three-section styling on 7' high doors gives a custom design look. Our 8' high doors have four-section styling. All panels have white finished interiors with matching, low-profile hinges. 7' high doors shown below. Doors over 9' wide have a vertical seam added for support.



Colors

Stain colors shown below on oak wood grain pattern. Actual door colors may vary from brochure photos due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching before ordering your door.



Window styles

For Horizontal Raised and Horizontal V-Groove panels






For Vertical Long panel



12 Window













For Horizontal V-Groove panel







20 Window

Glass types

Clear, Insulated, Tempered, Obscure, Satin Etched and Tinted.



Foamed-in-place polyurethane insulation

R-value* of 7.6 helps control costly heat loss and gain. This type of insulation can help diminish street noise and provides for quieter door operation.



Designed with award-winning safety and technology features including pinch-resistant door panels.

Bulb-type bottom weatherseal

Guards against wind and rain while providing a cushion when closing.



*Overhead Door Corporation uses a calculated door section R-value for our insulated doors.



Fiberglass exterior The beauty of wood without the maintenance.



Factory installed powder-coated hardware ensures proper alignment and smoother operation with a clean interior appearance.



Impression Steel Collection®

Model 5800

Panel styles

Vertical Raised (VR) (501)







Colors

Actual door colors may vary from brochure photos due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching before ordering your door.

Standard finishes









Premium finishes



Terra Bronze

Black

Gray

Window styles















Stockton (6-Pane)



Stockton (8-Pane)



Wyndbridge (3-Pane)



Wyndbridge (4-Pane)

Somerton (8-Pane)

Window size and shape may vary slightly based on door size.

Option of single or double arch for double car doors.

All window styles are made using a single piece of glass with dividers.

Available in insulated and non-insulated glass.







Clear

Obscure

Satin Etched



Three sections for 7' doors provide large steel embossments for a dramatic appearance.



Foamed-in-place, polyurethane insulation sandwiched between two layers of corrosion-resistant steel with a R-value* of 12.

Oversized windows provide maximum natural light into the garage – one of the largest garage door windows on the market!

Wind load-rated to withstand a variety of wind conditions and meet local building codes.

* Overhead Door Corporation uses a calculated door section R-value for our insulated doors.



Carriage House Collection

Model 7540

Panel styles

Three-section styling on 7' high doors (shown below) gives a custom design look. Our 8' high doors have four-section styling. Models are available with or without windows and with square or arched tops. 7' high doors with square tops are shown.

Horizontal Overlay (H)

(301)



Panel (MP)

Mixed

A Shaped Overlay (A) (303)

V Shaped Overlay (V) Flush Recessed Panel (FRP)

Horizontal

Horizontal & Vertical Overlay (E





Horizontal & Vertical Overlay (E2)



& Vertical Overlay (E3) (307)



& Vertical



X Shaped

Colors

Actual door colors may vary from brochure photos due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching before ordering your door.

Painted finishes









White (Standard)

Two-toned painted finishes





Clay/White



Trim boards are white (standard).

Stained finishes



Mahogany



Gray



Walnut



Clay



Natural Oak



Honduran Mahogany



Green



Red Oak



Hot-dipped galvanized steel with two coats of baked-on polyester paint.





Polyurethane insulation provides thermal efficiency with an R-value* of 10.



Bulb seal protects against the elements.



Embossed wood grain texture adds beauty, sophistication and durability.

Window styles



1 Plain Window Square





12 Window Square 24 Window Square



Plain Window Arched



- 12 Window Arched
- 24 Window Arched



6 Window Square 12 Window Square



16 Window Square 32 Window Square



6 Window Arched 12 Window Arched



16 Window Arched 32 Window Arched



8 Window Square 16 Window Square



8 Window Arched 16 Window Arched

1 – Windows for single car doors. 2 – Windows for double car doors.

Option of single or double arch for double car doors. Models are also available in solid arched top panels (no windows).

Glass types

Clear, Insulated, Tempered, Obscure, Satin Etched and Tinted.

^{*}Overhead Door Corporation uses a calculated door section R-value for our insulated doors.

Courtyard Collection®

Models 7560, 7520

Panel styles

Panels shown below in square top. Also available in Arched top.

Models 7560/7520



Horizontal Overlay (H2) (371M/161M)



Vertical A Shaped Overlay (C5) (373T/163T)



A Shaped Overlay (A2) (375B/165B)



X Shaped Overlay (X)

Models 7560

Vertical Overlay (C2)



Vertical

Horizontal Overlay (H3) (161B)



Diagonal

Horizontal & Vertical Overlay (E3) (164A)





Overlay (V1)†

Overlay (C4)

V Shaped



Horizontal













Diagonal

Vertical Board Design (D)

(168B)



† Windows and arches not available.

Colors

Actual door colors may vary from brochure photos due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching before ordering your door.











White



Almond

Desert Tan Gray*

* Model 7560 only

Brown Hunter Green

Black*



Foamed-in-place polyurethane insulation provides an R-value* of up to 12.76 and U-factor up to 0.24.



Model 7520



In-between-section thermal seals

With an air infiltration rating as low as .08 cfm, these seals help to provide superior resistance to the elements.



Weather resistant

Wood grain textured trim boards are resistant to dents and the elements.

Window styles



Clear Long



Stockton Arch

Insulated glass available.



Stockbridge



Somerton



Stockton



Wyndbridge Arch

- $^{\star}\,$ R-value: The higher the R-value, the greater the insulating properties.
- ** U-factor: A tested value of actual energy loss of an installed door, wall, or window assembly.

Features	MODEL 7520	MODEL 7560
Wood grain trim	•	•
Color matched trim		•
Warranty	20-year Limited	Limited Llifetime
Polyurethane insulation	•	•
R-value*	9.3	12.76
U-factor**	0.24	0.24
Overlay thickness	3/8"	3/4"
Door thickness	1"	1%"
Commercial track	optional	•
Residential track	•	
Ball bearing rollers with nylon wheels	•	•

Courtyard Collection®

WindStorm[™] Model 7565

Panel styles

Panels below shown in square top. Also available in arched top.





Horizontal Ovelay (H4)



V Shaped Overlay (V)



Horizontal Ovelay (H1)



Vertical Ovelay (C4) (914)



Overlay (A) (915)

Horizontal Ovelay (H2)



Vertical Ovelay (C5)



Overlay (A2)



Horizontal Ovelay (H3) (911)



X Shaped Overlay (X)



Colors

Actual door colors may vary from brochure photos due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching before ordering your door.

Color options













Overlay texture options



Wood grain (Standard)



Smooth

Window styles

Contact your Overhead Door™ Distributor to determine window availability and your local building official for code requirements.

Non-impact windows



Stockton Arch







Stockton Arch Impact





Somerton



Stockbridge Impact



Somerton Impact







Stockton Impact addii iiibb

Wyndbridge Impact



Stringently tested to meet wind load requirements.



Available with impact rated options.

Reinforced hardware throughout the door.

Designed to meet local building codes – when ordered with the appropriate wind load options – including Miami-Dade County.

Foamed-in-place polyurethane insulation – with an R-value of 12.12* can improve the thermal efficiency of your garage space, reduce street noise and make the door operate more quietly.

Durable overlays are specially treated to resist termites, weather and fungal decay.

Joint seals – snug-fitting tongue-and-groove section joints reduces wind and weather from entering the garage.

For specific wind load information please see page 28.

FEATURES	7565 SERIES
Wood grain trim	•
Polyurethane insulation	•
R-value	12.12
Overlay thickness	3/8"
Door thickness	1 3/8"
Commercial track	Optional
Residential track	•
Ball bearing rollers with nylon wheels	•
Warranty	Limited Lifetime

^{*} R-value: The higher the R-value, the greater the insulating properties.

Thermacore® Collection

Models 5720, 5740, 5760

Panel styles

Our Thermacore® doors feature wood grain embossment to enhance the appearance of your door. Doors are available in 7' or 8' height.

Standard Panel (SP) (S)

10



Models 5720, 5740, **5760** (297, 194, 494)

Long Panel (LP) (L)



Models 5720, 5740, 5760 (295, 198, 496)

Vertical Short (VS) (V5)



Models 5720, 5740, 5760 (296, 199, 497)

Flush Panel



Models 5720, 5740, 5760 (298, 195, 495)

Vertical Long (VL) (V10)

Model 5740





Model 5740 (196)

Colors

Painted finishes



White



Desert Tan





Terra Bronze







Hunter Green





Black

Textured Wood Grain finishes



Golden Oak





Mission Oak

Actual door colors may vary from brochure photos due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching before ordering your door.

Modern Metallic finishes (Shown on Microgroove Panel)







Black Frost

Window styles

For the full selection of windows for Thermacore® Collection doors please see page 35.



Thermacore® construction

Provides a continuous layer of foamed-in-place, CFC-free polyurethane insulation sandwiched between two layers of corrosion-resistant steel, for maximum thermal efficiency.





Multiple surface options

Embossed wood grain, microgroove and smooth.

In-between section thermal seals

With an air infiltration rating of up to 0.08 cfm, these seals help to provide superior resistance to the elements.



Durable finish Hot-dipped galvanized steel with two coats of baked-on polyester paint.



weatherseal
Guards against wind and rain
while providing a cushion when
closing.

MODELS	THICKNESS	POLYURETHANE INSULATION	R- VALUE*	U-FAC- TOR**	STEEL BACKING	WARRANTY
5720	1"	•	9.31	0.24	•	20-Year Limited
5740	1 ³ /8"	•	12.76	0.24	•	Limited lifetime
5760	2"	•	17.5	0.16	•	Limited Lifetime

^{*} R-value: The higher the R-value, the greater the insulating properties.

^{**} U-factor: A tested value of actual energy loss of an installed door, wall, or window assembly.

Thermacore® Collection

WindStorm™ Models 5745 & 5765

Panel styles

Our Thermacore® doors feature wood grain embossment to enhance the appearance of your door. Doors are available in 7' or 8' height.

Standard Panel (SP) (Standard)



Model 5745 (901, 906)

Long Panel (LP)

Models 5745, 5765

Vertical Short (VS) (V5)



Models 5745, 5765 (903, 908)



Models 5745, 5765 (905, 909)

Vertical Long (VL)



Model 5745 (904)

Colors

Actual door colors may vary from brochure photos due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching before ordering your door.

Standard painted finishes



Textured wood grain finishes (Model 5745 VS & VL only)



Window styles

For the full selection of windows please see page 36.

Model 5745 (Impact glass available).

For Vertical Short Panels with windows a full row of windows are required.

For Standard, Vertical Short, Long Panels with windows a full row of impact windows are required.

Model 5765 (Impact glass not available).

For Vertical Short Panels with windows a full row of windows are required.





Stringently tested to meet wind load requirements.

Impact resistant.

Reinforced hardware throughout the door.

Designed to meet local building codes – when ordered with the appropriate wind load options – including Miami-Dade County.

Thermacore® construction – a continuous layer of foamed-inplace, CFC-free polyurethane insulation between two layers of corrosion-resistant steel.

In-between section thermal seals – snug-fitting tongue-and-groove section joints reduces wind and weather from entering the garage.

Heavy gauge steel end caps for better appearance, improved strength and to protect the insulation from damage.

Bulb-type bottom weatherseal guards against wind and rain while providing a cushion when closing.

For specific wind load information please see page 28.

MODELS	THICKNESS	POLYURETHANE INSULATION	R-VALUE*	STEEL BACKING**	WARRANTY
5745	1 3/8"	•	12.12	•	Limited Lifetime
5765	1 7/8"	•	16.22	•	Limited Lifetime

^{*} R-value: Overhead Door Corporation uses a calculated door section R-value for our insulated doors. The higher the R-value, the greater the insulating properties.

^{**} Backing: Steel - Interior-side steel backing for strength and finished appearance.

Durafirm Collection®

Model 3560

Panel styles

Doors are available in 7' or 8' height. Shown in 7'.

Standard Panel (SP)

(Standard) (870)



Vertical Short (VS)

(V5) (872)



Colors

Actual door colors may vary from brochure photos due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching before ordering your door.













Glacier White

Cape Cod Gray

Monterey Sand

Adobe Cream

Window styles

Insulated windows are available.















4-piece Williamsburg



8-piece Williamsburg

Glass types







Obscure

Satin etched privacy glass is available with three styles of etching.



Eclipse



Diamond



Prairie



Bonded steel, polyurethane and vinyl

Provide incredible strength, impressive sound absorption and energy efficiency with an R-value* of up to 11.75.



Deep raised panels

Rich wood grain texture for the timeless look of freshly painted hardwood. Available in standard panel style only.

Through-and-through color PVC construction

Color goes all the way through the exterior vinyl skin so scratches are minimized.

UV-resistant resin

Contains special polymers that protect your door from the sun's harmful ultraviolet rays.

Twin structural struts

22-gauge steel C-channels run the full length of each panel and are anchored to interior steel stiles for strength.

*Overhead Door Corporation uses a calculated door section R-value for our insulated doors.



Traditional Steel Collection

Models 1400, 1440, 1500, 1540, 1600

Panel styles

Our Traditional Steel Collection doors feature a wood grain embossment to enhance the appearance of your door. Choose from Standard, Long or Vertical Short panels.

Standard Panel (SP) (Standard)



Models 1400, 1440, 1500,1540

Standard Panel (SP)

(Standard)



Model 1600 (391)

Long Panel (LP)



Models 1400 1440, 1500, 1540 (171/174/181/184)

Long Panel (LP)



Model 1600

Vertical Short (VS)



Models 1400, 1440, 1500, 1540 (171/174/181/184)

Colors

Actual door colors may vary from brochure photos due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching before ordering your door.

Standard finishes













White

Almond

Desert Tan

Taupe/Sandstone* Brown

Textured wood grain finishes**





*Called Sandstone on Model 1600. **Not available on Model 1600

Walnut

Mission Oak

Window styles

For the full selection of windows for Traditional Steel doors please see page 37.

Glass types









Bronze

Optional glass include:

- Solar Bronze Model 1600 (SP)
- High velocity glass not available on
- Model 1600 (LP) Insulated glass -Model 1600 (SP)



Embossed wood grain texture Adds beauty, sophistication and durability.



Reinforced door construction

For maximum strength, durability and minimal weight.





Durable finish Hot-dipped galvanized steel with two coats of baked-on polyester paint.



Bulb-type bottom weatherseal Guards against wind and rain while providing a cushion when closing.

MODELS	THICKNESS	POLYURETHANE INSULATION*	R-VALUE**	HEAVY- DUTY STEEL§	BACKING [†]	WARRANTY
1400	2"					15-year Limited
1440	2"			•		Limited Lifetime
1500	2"	•	7.4		Vinyl	20-year Limited
1540	2"	•	7.4	•	Vinyl	Limited Lifetime
1600	2"	•	9.8		Steel	Limited Lifetime

 $^{^{\}star}$ Polystyrene insulation: Refers to insulation for improved energy efficiency and sound reduction.

^{**} R-value: The higher the R-value, the greater the insulating properties.

[§] Heavy-duty steel: A thicker, more durable and dent-resistant option, designed to withstand additional knocks and bumps from outdoor activity.

[†] Backing: Vinyl – For a clean, more finished look and added sound absorption. Steel – Interior-side steel backing for strength and finished appearance.

$WindStorm^{{\scriptscriptstyle ext{ iny M}}}$

Wind load-rated system for garage doors

Our WindStorm™ rated doors not only provide reliable protection against high wind damage, but also feature fine craftsmanship, trouble-free performance, lasting durability and eye-catching curb appeal.

APPROVAL AGENCIES/BUILDING CODES

		ALLIKOVA	AL AGENCIE.	3/ DOILDING	CODES	
Collection	Building Code (IBC) & International Residential Code (IRC)	Florida Building Code (FBC)	Florida Building Code (FBC) Impact Rated	Texas Department of Insurance (TDI)	Texas Department of Insurance (TDI) Impact Rated	Miami- Dade County
Courtyard Collection®	•					
Thermacore® Collection	•					
Signature® Carriage Collection	•	•				
Durafirm Collection®	•	•				
Impression Fiberglass Collection®	•	•		•		
Impression Steel Collection®	•	•		•		
Carriage House Collection	•	•		•		
Modern Aluminum Collection	•	•	•			
Courtyard Collection® WindStorm™	•	•	•	•	•	•
Thermacore® Collection WindStorm™	•	•	•	•	•	•
Traditional Steel	•	•	•	•	•	•

Collection

Decorative Hardware

Accents for style

Further individualize your garage door with our distinctive decorative exterior handles and hinges. Available as optional accessories on our door collections. Not all hardware will fit all door sizes. Consult your local distributor for more information.

Premium Collection





Signature Carriage® Wood

Available on Single Door



3PS- Three Pane Square Top



3PA- Three Pane Arched Top



4PS- Four Pane Square Top





Three over Three Square Top



Available on **Double Door**



3PS- Three Pane Square Top



3PA- Three Pane Arched Top



4PS- Four Pane Square Top



4PA- Four Pane Arched Top



Three over Three Square Top



Three over Three Arched Top 6PA-









8PA- Four over Four Arched Top



8PS- Four over Four Square Top



8PA- Four over Four Arched Top











22S- Two over Two Square Top



22A- Two over Two Arched Top





2PA- Two Pane Arched Top



22S- Two over Two Square Top




22A- Two over Two Arched Top

Double door - double arched windows are available on some models. Not all window options available for all models. Consult your Overhead Door™ Distributor for additional options that may be available.

Thermacore[©] Collection

Available on Standard, Flush and Vertical Short panels

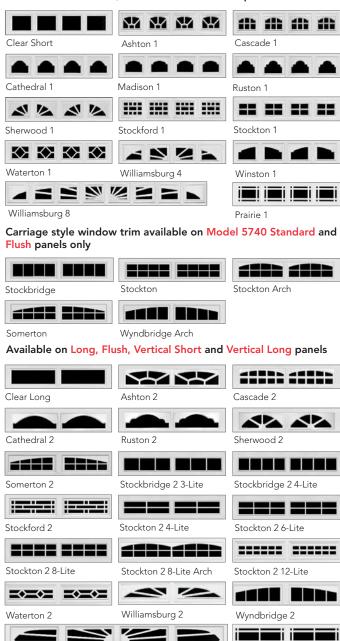

Available on Flush and Microgroove panels in Modern Metallic finishes only. Modern Metallic finishes cannot be paired with other window options.

Prairie 2

Williamsburg 2 (4 pc)

Thermacore® Models 5745 & 5765

Available on Standard and Flush panels










Williamsburg 1

*Flush panel only


Available on Vertical Short panels




Arched Stockton*



windows.







Waterton 1

Waterton 3**


Choice of single or double arch is available for arched top double car

Available on Vertical Long panels







Ashton 4




Waterton 4 Williamsburg 4
Williamsburg 4

Available on Long panels








Traditional Steel Collection

Available on Standard Panel and Vertical Short panels

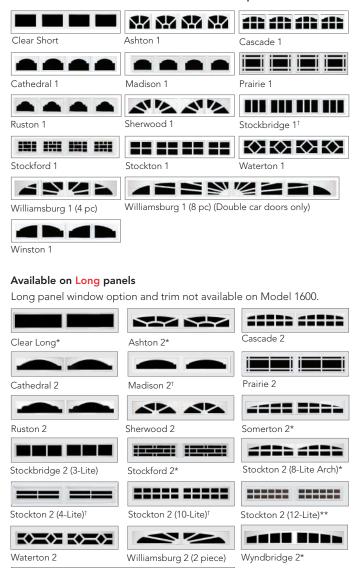

- Limited availability depending on door size.
- ** Model 1600 (LP) only
- Not available on Model 1600

Williamsburg 2 (4 piece)

Openers

Designed for performance





LED light fixture

Battery Backup capable
Available with integrated
OHD**ANYWHERE**

Infinity[™] 2000 Models 9020H/9120H-B

The ultimate in power, speed and convenience Direct drive wall mount

- Integrated Wi-Fi with OHD Anywhere® optional (9120H-B)
- Integrated Battery Backup (9120H-B)
- 24V DC motor
- Opening speed up to 7.5 in/second
- LED light fixture included
- CodeDodger® access security system



Battery Backup capable
Available with integrated
OHD**ANYWHERE**...

Destiny® 1500 Models 8060/8160H

Power, speed, intelligence and convenience Direct screw drive

- Integrated Wi-Fi with OHD Anywhere® optional (8160H)
- 140V DC motor
- Opening speed up to 12 inches/second
- CodeDodger® access security system
- Motion detection activates lights



Battery Backup capable
Available with integrated
OHD ANYWHERE

Destiny® 1200 Models 8030/8130H

Quiet yet powerful with the ultimate in convenience

Belt or chain drive

- Integrated Wi-Fi with OHD Anywhere® optional (8130H)
- 140V DC motor
- · Opening speed up to 9 inches/second
- CodeDodger® access security system
- Motion detection activates lights



Odyssey® 1200 Model 7060

Power, speed and intelligence

Direct screw drive

- 140V DC motor
- Opening speed up to 10 inches/second
- Maintenance free screw drive rail
- CodeDodger® access security system
- Motion detection activates lights



Battery Backup capable

Odyssey® 1000 Model 7030

Quiet yet powerful performance

Belt or chain drive

- 140V DC motor
- Opening speed up to 7.5 inches/second
- CodeDodger® access security system

Openers

Designed for performance



Legacy® 920

Models 7020H/7020H-B /7120H/7120H-B

Flexible platform with power and reliability

Belt or chain drive

- 24V DC motor
 - · Opening speed up to 7.0 in/second†
 - DC motor for quiet operation and lighter handling
 - C-channel rail for strength and aesthetics
 - CodeDodger® access security system
 - Integrated Wi-Fi with OHD Anywhere® (7120H/7120H-B)
- Optional Integrated Battery Backup





Legacy® 850 Models 2029/2029-B/2129/2129B

Power, value and reliability

Belt or chain drive

- 24V DC motor
 - Opening speed up to 7.0 in/second
 - DC motor for quiet operation and lighter handling
- · C-channel rail for strength and aesthetics
- CodeDodger® access security system
- Integrated Wi-Fi with OHD Anywhere® (2129/2129B)



- +

Can be ordered with (2029B, 2129B) or without (2029, 2129) optional integrated battery backup at time of purchase only.



Legacy® 650 Models 1029/1029B/1129/1129B

Value and reliability

Belt or chain drive

- 24V DC motor
- Opening speed up to 6.5 in/second
- DC motor for quiet operation and lighter handling
 - C-channel rail for strength and aesthetics
 - CodeDodger® access security system
 - Integrated Wi-Fi with OHD Anywhere® (1129/1129B)



OHD/ANYWHERE....

Can be ordered with (1029, 1129B) or without (1029B, 1129)B optional integrated battery backup at time of purchase only.

Nationwide distributor network



Transform Your Home with the DoorView® visualization tool.



Go to overheaddoor.com to try our online interactive software tool that lets you visualize what your home would look like with an Overhead Door™ garage door. Contact your local Overhead Door™ Distributor for more information and to receive a quote.















The Genuine. The Original.



2501 S. State Hwy. 121 Bus., Suite 200, Lewisville, TX 75067 1-800-929-DOOR • sales@overheaddoor.com overheaddoor.com

©2020 Overhead Door Corporation. Overhead Door is a trademark and the Red Ribbon logo is a registered trademarks of Overhead Door Corporation. All other trademarks are the property of their rightful owners. Consistent with our policy of continuing product improvements, we reserve the right to change product specification without notice or obligations. R900-231 5M 01/20 JAR

SOLD AND DISTRIBUTED BY: